



I-100 IMPACT CRUSHER



I-100
f YouTube e

WORKS FOR YOU.™

I-100

The Terex Finlay I-100 tracked impact crusher has been specifically designed for quarrying, recycling and demolition applications. The I-100 features a Ø860mm x 860mm (Ø34" x 34") direct drive impact chamber with variable rotor speed. The advanced electronic control system monitors, controls and regulates the speed of VGF with, integrated pre-screen, to maintain a consistent feed of material into the impact chamber while maintaining optimal crushing capacity. The machine provides operators high material reduction ratios and produces a consistent product grading.

STANDARD FEATURES

ENGINE:

Tier 3 / Stage IIIA: Caterpillar C7.1 Tier 3 ACERT 186kW (250hp)
Tier 4 Final / Stage IV: Scania DC09 202Kw (275hp)

Impact Chamber:

Terex CR004 Impact chamber
4 bar rotor - Martensitic blow bars 2 High & 2 Low
Full Hydraulic apron setting
Direct Drive via Clutch

Hopper / Feeder:

Hopper Capacity: 2.3m³ (3.1yd³)
Heavy duty vibrating feeder
Stepped grizzly feeder with integral pre-screen, standard 25mm Tines spacing. 30mm woven mesh for underscreen as standard
30mm woven mesh for underscreen as standard
Selectable discharge to by-pass conveyor or main conveyor

Main Conveyor:

Belt Width: 900mm (36") full length
High spec scraper at head drum
Wear resistant liners at crusher discharge point

General:

Piped for overband magnet
Hand Held Track Control Set with Connection Lead
Safety Guards in Compliance with Machinery Directive
Galvanised catwalk c/w handrail, kick board and access ladders
Heavy Duty Track Unit - 2.92m (9' 7") Sprocket Centres, 400mm (16") Shoe Width
Emergency stops



Hopper / Feeder

- ▶ Hopper capacity: 2.3m³ (3.01yd³)
- ▶ Feed height: 3.2m (10' 6")
- ▶ Material: 8mm wear resistant steel
- ▶ Width at rear: 2.26m (7' 5")
- ▶ Vibrating Grizzly feeder (VGF): 3.27m x 800mm (10' 9" x 32")
- ▶ VGF tine aperture: 25mm Standard
- ▶ VGF wire mesh aperture: 30mm Standard
- ▶ Speed: variable, 450 - 850 rpm

By-pass conveyor (optional)

- ▶ Belt Width: 500mm (20")
- ▶ Belt Spec: plain
- ▶ Working Angle: 25°
- ▶ Speed: 60 - 70 mpm
- ▶ Hydraulically folds for transport
- ▶ Discharge Height: 2.03m (6' 8")
- ▶ Stockpile capacity: 13.8m³ (18yd³) @ 40°

Features:

- ▶ Hydraulic apron setting assist provides convenient and efficient adjustment of the aprons.
- ▶ Hydraulic overload protection provides instant protection for uncrushable material.
- ▶ Heavy duty vibrating feeder (VGF) with integrated pre-screen helps by-pass dirty fines
- ▶ Direct drive crusher chamber with independent belt tensioner allowing for rapid adjustment.
- ▶ Crusher chamber is supplied with a 4 bar rotor and two apron design for large reduction ratios.

Impact chamber

- ▶ Rotor diameter: Ø860mm (34")
- ▶ Rotor width: 860mm (34")
- ▶ Inlet opening: 860mm x 610mm (34" x 24")
- ▶ Rotor speed Range: 700 rpm - 930 rpm
- ▶ Maximum Feed Size: Dependant on application 350mm Cube Approx
- ▶ Drive arrangement: Direct drive via clutch
- ▶ Twin Apron
- ▶ Maximum apron settings: 120mm Primary, 55mm Secondary
- ▶ Minimum apron settings: 40mm Primary, 20mm Secondary
- ▶ Rotor Configuration: 4 bar rotor, 2 high / 2 low standard
- ▶ Hydraulic overload protection
- ▶ Hydraulic apron setting assist
- ▶ Blowbar options: Martensitic (standard), ceramic & high chrome

Powerpack

- ▶ Tier 3 / Stage IIIA: Caterpillar C7.1 Tier 3 ACERT
Engine Power: 186kW (250hp)
Engine Speed: 1700-2100 rpm
- ▶ Tier 4F / Stage IV: Scania DC09
Engine Power: 202kW (275hp)
Engine Speed: 1500-2000 rpm

Magnet (optional)

Main conveyor

- ▶ Belt Width: 900mm (36")
- ▶ Belt Spec: plain
- ▶ Working Angle: 22°
- ▶ Speed: 95 - 110 m/min
- ▶ Full length main conveyor with impact bars at feed point
- ▶ Main conveyor can be lowered hydraulically for maintenance
- ▶ Dust suppression: fitted with hose and spraybars as standard (no pump supplied)
- ▶ Discharge Height: 3.25m (10' 8")
- ▶ Stockpile capacity: 51m³ (66.7yd³) @ 40°


Undercarriage

- ▶ Shoe Width: 400mm (16")
- ▶ Sprocket Centres: 2.92m (9' 7")
- ▶ Track Speed: 1.8 km/h
- ▶ Gradeability: 25°

Transport Dimensions



Working Dimensions

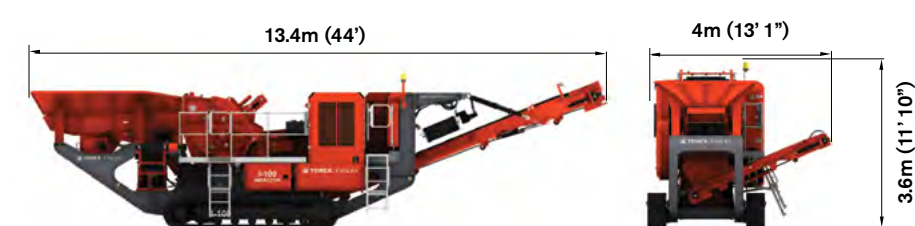

Machine weight: *27,000kg (59,525lbs)
* With by-pass conveyor & twin pole magnet

WORKS FOR YOU.™

Follow us on:



www.terexfinlay.com

Effective January 2015. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex GB Ltd. makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries. Copyright 2010 Terex GB Ltd.



TEREX® | FINLAY

WORKS FOR YOU.™