

# TRACKED MOBILE IMPACT CRUSHER



**I-130**  
  

**WORKS FOR YOU.™**



# I-130

The Terex Finlay I-130 tracked impact crusher has been specifically designed for quarrying, mining, recycling and demolition applications. The Terex Finlay I-130 incorporates a Terex 1313 impact chamber with direct drive and advanced electronic control system. The large hopper features a variable speed VGF feeder and is available with an optional independent pre-screen with constant RPM for optimum separation even if feeder speed is reduced. The machine provides operators high material reductions ratios and produces a excellent product shape.

## STANDARD FEATURES

### Engine:

Tier 3 / Stage IIIA - Caterpillar C13 328kW (440hp)

Tier 4i / Stage IIIB : Scania DC13 331kW (450hp)

### Chamber:

Terex CR019 Impact chamber

Hydraulic adjust apron setting

4 bar rotor - Toolsteel blow bars 2 High & 2 Low

Direct Drive

### Hopper / Feeder:

Hopper capacity: 9m<sup>3</sup> (11.7yd<sup>3</sup>)

Hydraulically folding hopper sides

Heavy duty vibrating feeder

Stepped grizzly feeder with integral pre-screen, standard 50mm spacing

Mesh aperture on grizzly feeder: 38mm

Selectable discharge to by-pass conveyor or main conveyor

### Main Conveyor:

Belt width: 1m (40") full length

High spec scraper at main conveyor head drum

Piped for dust suppression c/w Spraybars

## GENERAL:

Piped for overband magnet

Two Speed Tracking

Heavy Duty Track Unit - 3.78m (12' 5") Sprocket Centres, 500mm (20") Shoe Width

Hand Held Track Control Set with Connection Lead

Safety Guards in Compliance with Machinery Directive

Galvanised catwalk c/w handrail, kick board and access ladders

Emergency stops

### Main Conveyor

- ▶ Belt Width: 1m (40")
- ▶ Belt Spec: plain
- ▶ Working Angle: 22°
- ▶ Speed: 120 - 135 m/min
- ▶ Full length main conveyor with impact bars at feed point
- ▶ Main conveyor can be lowered hydraulically for maintenance
- ▶ Dust suppression: fitted with hose and spray bars as standard (no pump supplied)
- ▶ Discharge Height: 3.7m (12' 10")
- ▶ Stockpile capacity: 75.3m<sup>3</sup> (98.5yd<sup>3</sup>) @ 40°
- ▶ Optional vibratory undercrusher feeder with wear resistant liners and 2/3 length main conveyor

### Powerpack

- ▶ Tier 3 / Stage IIIA: Caterpillar C13  
Engine Power: 328kW (440hp)  
Engine Speed: 1700 - 2100 rpm
- ▶ Tier 4i / Stage IIIB: Scania DC13  
Engine Power: 331kW (450hp)  
Engine Speed: 1700 - 2100 rpm

### Impact Chamber

- ▶ Rotor diameter: Ø1270mm (50")
- ▶ Rotor width: 1220mm (48")
- ▶ Inlet opening: 1.06m x 840mm (42" x 33")
- ▶ Rotor speed Range: 400 - 600 rpm
- ▶ Maximum feed size: 600mm (24")\* - depends on material
- ▶ Drive arrangement: Direct Drive
- ▶ Twin Apron
- ▶ Maximum apron settings: Primary 200mm (8") secondary 100mm (4")
- ▶ Minimum apron settings: primary 75mm (3") secondary 25mm (1")
- ▶ Rotor Configuration: 4 bar rotor, 2 high / 2 low standard
- ▶ Hydraulically opens for ease of access

### Hopper / Feeder

- ▶ Hopper capacity: 9m<sup>3</sup> (11.7yd<sup>3</sup>)
- ▶ Feed height: 4.17m (13' 8")
- ▶ Material: 12mm (1/2") wear resistant steel
- ▶ Width at rear: 2.65m (8' 8")
- ▶ Locking mechanism: manual
- ▶ Hydraulically folding sides and rear
- ▶ Vibrating Grizzly feeder (VGF): 1.5m x 1.2m (5' x 4')
- ▶ VGF grizzly aperture: 75mm standard (50mm, 100mm optional)
- ▶ VGF wire mesh aperture: 38mm
- ▶ Speed range: variable 450 - 850 rpm
- ▶ Optional Hopper extensions VGF ONLY - 11m<sup>3</sup> (14.4yd<sup>3</sup>)
- ▶ Optional Independent Hydraulic Prescreen - Feed height 4.28m (14') (+1500kgs / 3300lbs)

## Features:

- ▶ Fully hydraulic assisted apron setting features makes adjustment of the aprons convenient and efficient.
- ▶ Heavy duty vibrating feeder (VGF) with integral pre-screen removes dirt fines and sizes bypass material for reprocessing.
- ▶ Optional under crusher vibratory plate feeder with wear resistant liners aids material discharge flow and reduces under crusher blockages.
- ▶ Efficient direct drive crusher chamber is supplied with a 4 bar rotor as standard with a 3 bar rotor available as an option.



### Independent Hydraulic Pre-screen (Optional)

- ▶ For increased fines removal

### Magnet (optional)

### Undercarriage

- ▶ Bolt on tracks
- ▶ Shoe Width: 500mm (20")
- ▶ Sprocket Centres: 3.78m (12' 5")
- ▶ 2 Speed with 'soft start':
- ▶ Track Speed: 1.5km/h
- ▶ Gradeability: 25°

### Under-crusher Vibratory Feeder (optional)

- ▶ Full belt available (standard)

### Direct Crusher Drive


- ▶ Increased operating efficiency

### By-pass Conveyor (optional)


- ▶ Belt Width: 650mm (26")
- ▶ Belt Spec: Plain
- ▶ Working Angle: 22°
- ▶ Speed: 120 - 130 m/min
- ▶ Universal mounting to left or right hand side- (Specify at time of order)
- ▶ Hydraulically folds for transport
- ▶ Standard Discharge Height: 2.1m (7')
- ▶ Stockpile capacity: 13.8m<sup>3</sup> (18yd<sup>3</sup>) @ 40°
- ▶ Optional extended discharge height: 2.9m (9' 6")
- ▶ Extended Stockpile capacity: 36.3m<sup>3</sup> (47.5yd<sup>3</sup>) @ 40°



## Transport Dimensions

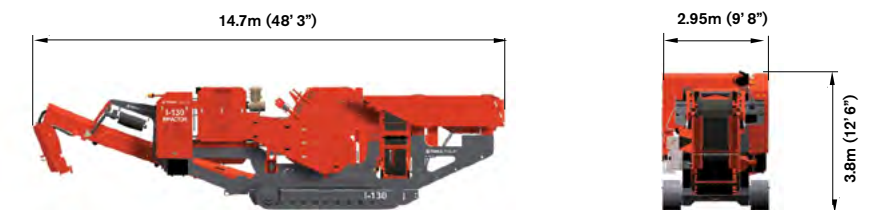

## Working Dimensions

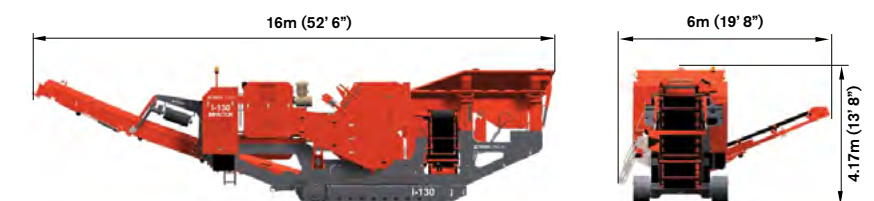

Machine Weight: \* 50,400Kg (111,113lbs)  
\*Standard machine configuration

Follow us on:



[www.terexfinlay.com](http://www.terexfinlay.com)

Effective January 2015. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex GB Ltd. makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries. Copyright 2010 Terex GB Ltd.



**TEREX® | FINLAY**

**WORKS FOR YOU.™**